



5230 Remote Annunciator



Program and Operate the 5104, 5204, or 5207 FACP from a Distance with the 5230 Remote Annunciator.

The 5230 remote annunciator provides remote annunciation for the 5104, 5204, and 5207 Fire Alarm Control Panel. The 5230 performs all system operations. It also provides trouble and alarm information and can be used for programming.

Operation

When the system is normal and receiving AC power, the power LED is on.


Users identify themselves to the control panel by entering a code on the annunciator. When a user presses a button, the annunciator piezo beeps and the LCD prompts the user to enter a code or other relevant information.

Features

- 2-line 16-character LCD display
- Indicates Trouble, Alarm, Supervisory, and System Status conditions with LEDs and LCD display
- Each 5230 is individually supervised by the FACP.
- Can be wired up to 1000 ft from FACP

Specifications

Operating Voltage:	12 VDC
Current Draw:	
Standby:	60 mA
Alarm:	120 mA

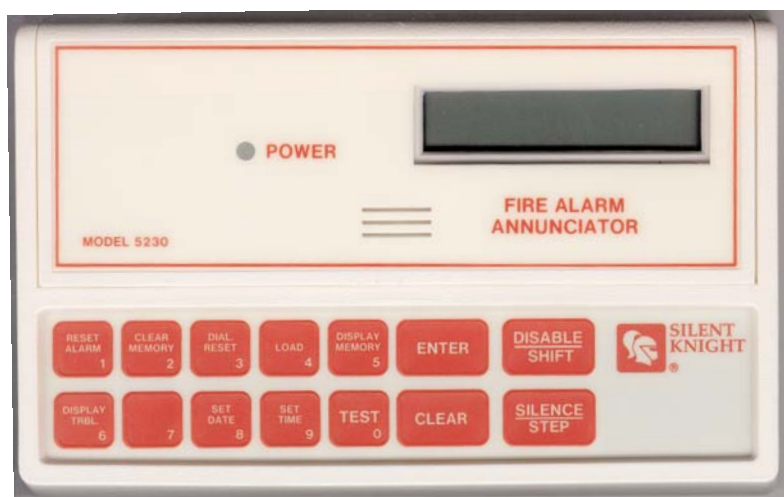

5230 Remote Annunciator

Dimensions:

Width:	6-7/8" (14.46 cm)
Height:	4-1/4" (10.79 cm)
Depth:	1" (2.54 cm)

Operating Temp:	32° to 120° F (0° to 49° C)
-----------------	--------------------------------

Maximum Wiring Distance:	1000 ft.
--------------------------	----------

Compatible Control

5104	3 per system
5204	3 per system
5207	7 per system



**SILENT
KNIGHT**




5230 Remote Annunciator

Engineering Specifications

The contractor shall furnish and install where indicated on the plans, the Model 5230 Remote Annunciator. Module shall be of a LCD type with a 2X16 display. Module shall be capable of remote programming as well as providing alarm, trouble information along with resetting of alarms and silencing of trouble and alarm conditions. Module ID shall be programmed with a 4 position DIP. The control shall be capable of supporting a minimum of 3 supervised 5230. Module shall be designed to mount on a single or dual gang electrical box with 18 gauge to 14 gauge wire.

Note: Wiring runs should be made using 18-gauge wire and not exceed 1000 feet (for each 5230 wired).

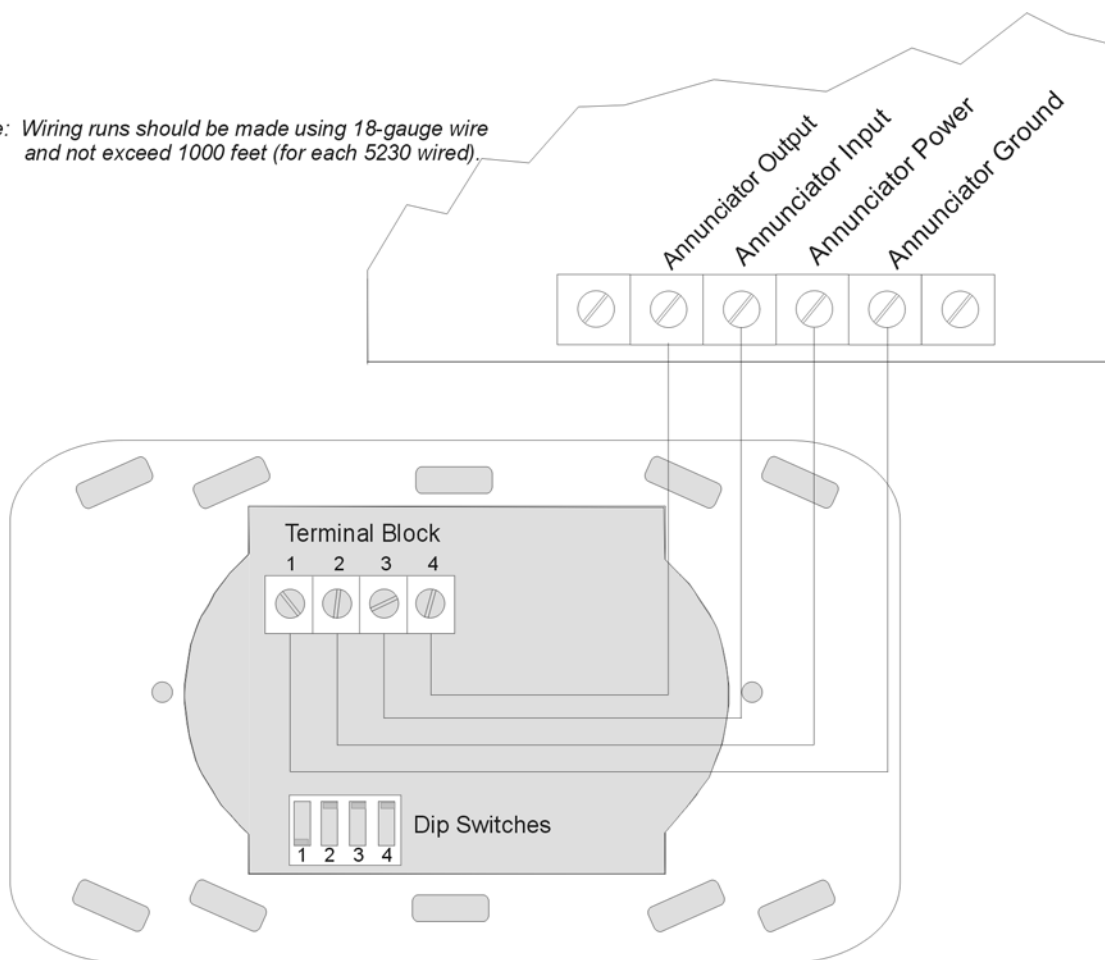

Model 5230 (Back View)



**SILENT
KNIGHT**

7550 Meridian Circle, Maple Grove, MN 55369-4927

800-446-6444 or in Minnesota 763-493-6435

FAX: 763-493-6475

World Wide Web: <http://www.silentknight.com>

MADE IN AMERICA

FORM# 350382, Rev. 8/00

Copyright © 2000 Silent Knight