



RBR1224 Electronic Toggle/Ratchet Relay


Specifications:

- 12 or 24 VDC selectable operation.
- Positive (+) or negative (-) ultra sensitive trigger (3 to 24 VDC @ 2 mA minimum).
- Double form "C" contact rated 2 amp @ 120 VAC or 28VDC.
- Relay status LED.
- Remote relay status LED output.
- Snap track mountable (order part # ST3).

Board dimensions: 3"L x 2.5"W x 1"H

Applications:

- Use with PGM alarm control panel outputs.
- Electronically shunt-alarm zones, door control, keypads.
- Interfaces with wireless receivers. keypads.
- Converts momentary to maintained contacts.

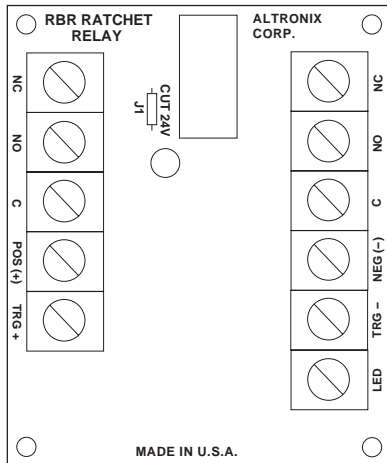

Installation Instructions:

1. Unit is factory set for 12 VDC operation. Cut jumper J1 located (top center left) for 24 VDC operation.
2. Connect aux power to terminals marked [POS (+)] and [NEG (-)].
3. The relay will change state to latch ON or OFF by the application of a positive or negative momentary voltage to the terminals marked [TRG +] or [TRG -].
4. Relay status LED is lit when relay is energized. To use a remote LED. Connect negative lead of remoted LED, to terminal marked [LED] connect positive lead of LED to [POS (+)].



Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.