



RBUL - UL Listed Sensitive Relay Module



Specifications:



- UL Listed Burglar Alarm System Accessory (UL 749R).
- Switch selectable 12VDC or 24VDC operation.
- Form "C" contact rated 1 amp, 115VAC/30VDC contacts.
- Current Draw 30 mA.

Board dimensions: 2.75"L x 2"W x 1"H

Instructions:

1. Mount relay in desired enclosure. Secure snap track with screws.
Be sure to provide enough clearance between PC board and snap track mounting screw head to avoid short circuit.
2. Connect DC input to terminals marked [+ (POS)] and [-(NEG)].
3. For 24VDC operation cut J1 on relay module.

Dry Contacts

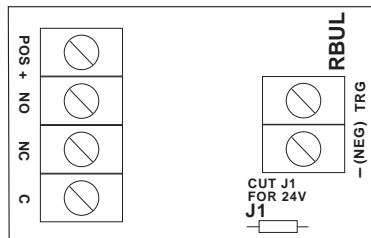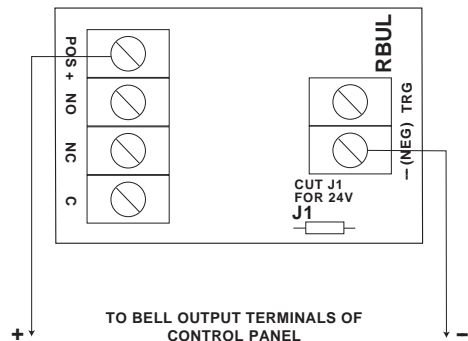

Altronix is not responsible for any typographical errors.

